


Wirewound/Metal Oxide Resistors, Commercial Power, Axial Lead



FEATURES

- High performance for low cost
- Meets or exceeds requirements of EIA Standard RS-344
- High power to size ratio
- Ceramic cases are available with circuit board stand-offs (designated with a -3 model ending)
- Special inorganic potting compound and ceramic case provide high thermal conductivity in a fireproof package

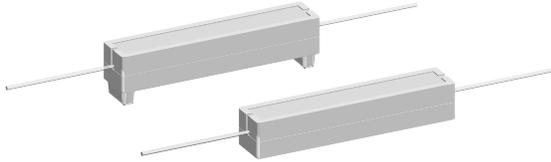

RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS				
GLOBAL MODEL	POWER RATING $P_{40^\circ C}$ W	RESISTANCE RANGE Ω $\pm 10\%$ Standard, $\pm 5\%$ Available		WEIGHT (Typical) g
		WIREWOUND**	METAL OXIDE**	
CP0002	2	0.1 - 1 k	100 - 12 k	2.0
CP0002...3	2	0.1 - 1 k	100 - 12 k	2.2
CP0003	3	0.1 - 2 k	150 - 22 k	3.4
CP0003...3	3	0.1 - 2 k	150 - 22 k	3.6
CP0005	5	0.1 - 2.4 k	150 - 27 k	4.8
CP0005...3	5	0.1 - 2.4 k	150 - 27 k	5.0
CP0007	7	0.1 - 5 k	1 k - 35 k	6.8
CP0007...3	7	0.1 - 5 k	1 k - 35 k	7.0
CP0010	10	0.1 - 7 k	1 k - 40 k	9.5
CP0010...3	10	0.1 - 7 k	1 k - 40 k	9.9
CP0015	15	0.1 - 8 k	1 k - 40 k	16.8
CP0015...3	15	0.1 - 8 k	1 k - 40 k	17.4
CP0020	20	0.1 - 10 k	1 k - 45 k	22.8
CP0020...3	20	0.1 - 10 k	—	23.6
CP0022	22	0.1 - 10 k	—	24.5
CP0022...3	22	0.1 - 10 k	—	25.3
CP0025	25	0.1 - 10 k	—	37.0

TECHNICAL SPECIFICATIONS		
PARAMETER	UNIT	WIREWOUND CHARACTERISTICS
Temperature Coefficient	ppm/ $^\circ C$	± 600 below 1 Ω , ± 300 1 Ω and above
Short Time Overload	-	5 x rated power for 5 seconds
Terminal Strength	lb	10 minimum
Operating Temperature Range	$^\circ C$	- 65/+ 275
Dielectric Withstanding Voltage	V_{AC}	1000
Maximum Working Voltage	V	$(P \times R)^{1/2}$
METAL OXIDE CHARACTERISTICS		
Temperature Coefficient	ppm/ $^\circ C$	± 300 for CP0002 to CP0005; ± 400 for CP0007 to CP0020
Short Time Overload	-	5 x rated power for 5 seconds
Terminal Strength	lb	10 minimum
Operating Temperature Range	$^\circ C$	- 65/+ 225
Dielectric Withstanding Voltage	V_{AC}	1000
Maximum Working Voltage	V	$(P \times R)^{1/2}$

** To specifically order a Wirewound sub-assembly for resistance values that overlap between the Wirewound and Metal Oxide technologies, the model will be a CPxxxx...85 for standard body and CPxxxx...91 for body with stand-offs. To specifically order a Metal Oxide sub-assembly for resistance values that overlap between the Wirewound and Metal Oxide technologies, the model will be a CPxxxx...100 for a standard body and CPxxxx...101 for body with stand-offs. If no dash type is specified, either technology may be supplied.


NOTE: Wirewound CP resistors can reliably function as a fuse and as a resistor. Such components involve compromise between fusing and resistive functions; therefore, each design should be tailored to the application to ensure optimum performance. Contact factory by using the e-mail address at the bottom of this page for design assistance.

GLOBAL PART NUMBER INFORMATION				
New Global Part Numbering: CP000515R00JB143 (preferred part numbering format)				
C	P	0	0	0
5	1	5	R	0
0	0	J	B	1
4	3			
GLOBAL MODEL (See Standard Electrical Specifications Global Model column for options)	VALUE R = Decimal K = Thousand R1500 = 0.15 Ω 1K500 = 1500 Ω	TOLERANCE H = $\pm 3.0\%$ J = $\pm 5.0\%$ K = $\pm 10\%$	PACKAGING E14 = Lead (Pb)-free bulk pack E31 = Lead (Pb)-free four layer bulk pack B14 = Bulk pack B31 = Four layer bulk pack	SPECIAL (Dash Number) (up to 3 digits) From 1-999 as applicable
Historical Part Number example: CP-5-3 15 Ω 5% B14 (will continue to be accepted)				
CP-5-3	15 Ω	5%	B14	
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING	


* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS

CPxxxx



CPxxxx...3

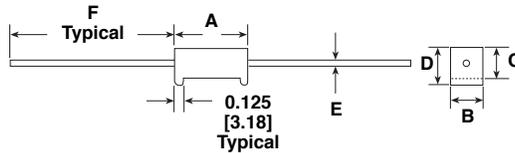
MATERIAL SPECIFICATIONS

Element: Wirewound = Copper-nickel alloy or nickel-chrome alloy, depending on resistance value

Metal Oxide = High temperature fired Metal Oxide film


Core: Wirewound = Woven fiberglass Metal Oxide = Alumina ceramic

Body: Steatite ceramic case with inorganic potting compound

End Caps: Tin plated steel

Terminals: Tinned copper

Part Marking: DALE, Model, Wattage, Value, Tolerance, Date Code

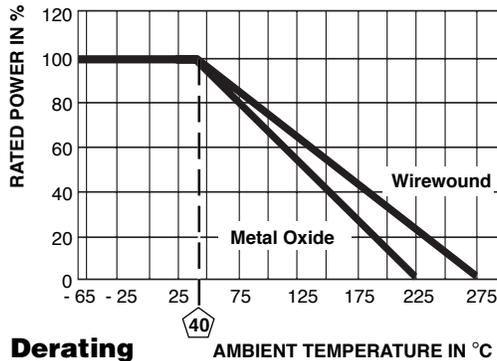
Derating

GLOBAL MODEL	DIMENSIONS in inches [millimeters]							
	A*	B	C	D	E		F	
	± 0.031 [0.794]	± 0.031 [0.794]	± 0.031 [0.794]	± 0.031 [0.794]	± 0.001 [0.025]		WIRE- WOUND	METAL OXIDE
					WIRE- WOUND	METAL OXIDE	± 0.125 [3.175]	MINIMUM
CP0002	0.688 [17.46]	0.250 [6.35]	0.250 [6.35]	—	0.032 [0.813]	0.032 [0.813]	1.500 [38.10]	0.750 [19.05]
CP0002...3	0.688 [17.46]	0.250 [6.35]	0.250 [6.35]	0.313 [7.94]	0.032 [0.813]	0.032 [0.813]	1.500 [38.10]	0.750 [19.05]
CP0003	0.875 [22.22]	0.313 [7.94]	0.313 [7.94]	—	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0003...3	0.875 [22.22]	0.313 [7.94]	0.313 [7.94]	0.375 [9.52]	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0005	0.875 [22.22]	0.375 [9.52]	0.344 [8.73]	—	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0005...3	0.875 [22.22]	0.375 [9.52]	0.344 [8.73]	0.406 [10.32]	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0007	1.391 [35.32]	0.375 [9.52]	0.344 [8.73]	—	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0007...3	1.391 [35.32]	0.375 [9.52]	0.344 [8.73]	0.469 [11.91]	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0010	1.875 [47.62]	0.375 [9.52]	0.344 [8.73]	—	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0010...3	1.875 [47.62]	0.375 [9.52]	0.344 [8.73]	0.469 [11.91]	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0015	1.875 [47.62]	0.500 [12.70]	0.500 [12.70]	—	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0015...3	1.875 [47.62]	0.500 [12.70]	0.500 [12.70]	0.625 [15.87]	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0020**	2.500 [63.50]	0.500 [12.70]	0.500 [12.70]	—	0.036 [0.914]	0.032 [0.813]	1.500 [38.10]	1.000 [25.40]
CP0020...3	2.500 [63.50]	0.500 [12.70]	0.500 [12.70]	0.625 [15.87]	0.036 [0.914]	—	1.500 [38.10]	—
CP0022	2.500 [63.50]	0.500 [12.70]	0.500 [12.70]	—	0.036 [0.914]	—	1.500 [38.10]	—
CP0022...3	2.500 [63.50]	0.500 [12.70]	0.500 [12.70]	0.625 [15.87]	0.036 [0.914]	—	1.500 [38.10]	—
CP0025	2.500 [63.50]	0.625 [15.87]	0.625 [15.87]	—	0.040 [1.016]	—	1.500 [38.10]	—

*Potting compound may extend outside of ceramic case up to 0.060" [1.52] maximum per side.

**Dimensions for the metal oxide are:

A = 2.360 [59.94], B = 0.570 [14.48], C = 0.530 [13.46], E = 0.032 [0.813], F = 1.000 [25.40]

PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS (EIA-344)
Thermal Shock	- 55 °C to + 275 °C (+ 225 °C for Metal Oxide), 5 cycles, 30 minute dwell time	± (5.0 % + 0.05 Ω) ΔR
Short Time Overload	5 x rated power for 5 seconds	± (4.0 % + 0.05 Ω) ΔR
Dielectric Withstanding Voltage	1000 V _{rms} for one minute	± (2.0 % + 0.05 Ω) ΔR
Low Temperature Operation	- 65 °C, full rated working voltage for 45 minutes	± (3.0 % + 0.05 Ω) ΔR
Humidity	75 °C, 90 % - 100 % RH, 240 hours	± (5.0 % + 0.05 Ω) ΔR
Load Life	1000 hours at rated power, + 25 °C, 1.5 hours "ON", 0.5 hours "OFF"	± (10.0 % + 0.05 Ω) ΔR
Terminal Strength	5 pounds for 30 seconds; body twisted about axis, 3 360° rotations	± (2.0 % + 0.05 Ω) ΔR
Resistance to Solder Heat	Terminal immersed 3.5 seconds in molten solder at 1/8" to 3/16" from body	± (4.0 % + 0.05 Ω) ΔR



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.