

This Information Is Provided By
CBTricks.com

Pace Service Bulletin #0002

Liability of damages to any equipment is the sole responsibility of the user! Downloading, viewing, or using any information provided on these pages automatically accepts the user to the terms of this agreement!

Modifications are provided for information purposes only!

Supporters of CBTricks.com paid for the hosting so you would have this file.

CBTricks.com is a non-commercial personal website was created to help promote the exchange of service, modification, technically oriented information, and historical information aimed at the Citizens Band, GMRS (CB "A" Band), MURS, Amateur Radios and RF Amps.

CBTricks.com is not sponsored by or connected to any Retailer, Radio, Antenna Manufacturer or Amp Manufacturer, or affiliated with any site links shown in the links database. The use of product or company names on my web site is not endorsement of that product or company.

The site is supported with donations from users, friends and selling of the Site Supporters DVD's to cover some of the costs of having this website on the Internet instead of relying on banner ads, pop-up ads, commercial links, etc. Thus I do not accept advertising banners or pop-up/pop-under advertising or other marketing/sales links or gimmicks on my website.

ALL the money from donations is used for CBTricks.com I didn't do all the work to make money (I have a day job). This work was not done for someone else to make money also, for example the ebay CD sellers.

All Trademarks, Logos, and Brand Names are the property of their respective owners.

This information is not provided by, or affiliated in any way with any radio or antenna Manufacturers.

Thank you for any support you can give.

For information on how to Support CBTricks.com

<http://www.cbtricks.com/support/>



PATHCOM INC.

PACE COMMUNICATIONS DIVISION

24049 SOUTH FRAMPTON AVENUE, HARBOR CITY, CALIFORNIA 90710 • TEL. (213) 325-1290 • TWX 910 347 7310 PATHCOM HRBO

SERVICE BULLETIN # 0002


CB 10-2 CIRCUIT REVISION

To improve the overall operation of our CB 10-2, we have made a few changes.

For better adjacent channel rejection, we have changed the IF filter from a LF-A6 to a LF-B6.

We are also using new and better transistors through out the entire unit.

SCHEMATIC DIAGRAM

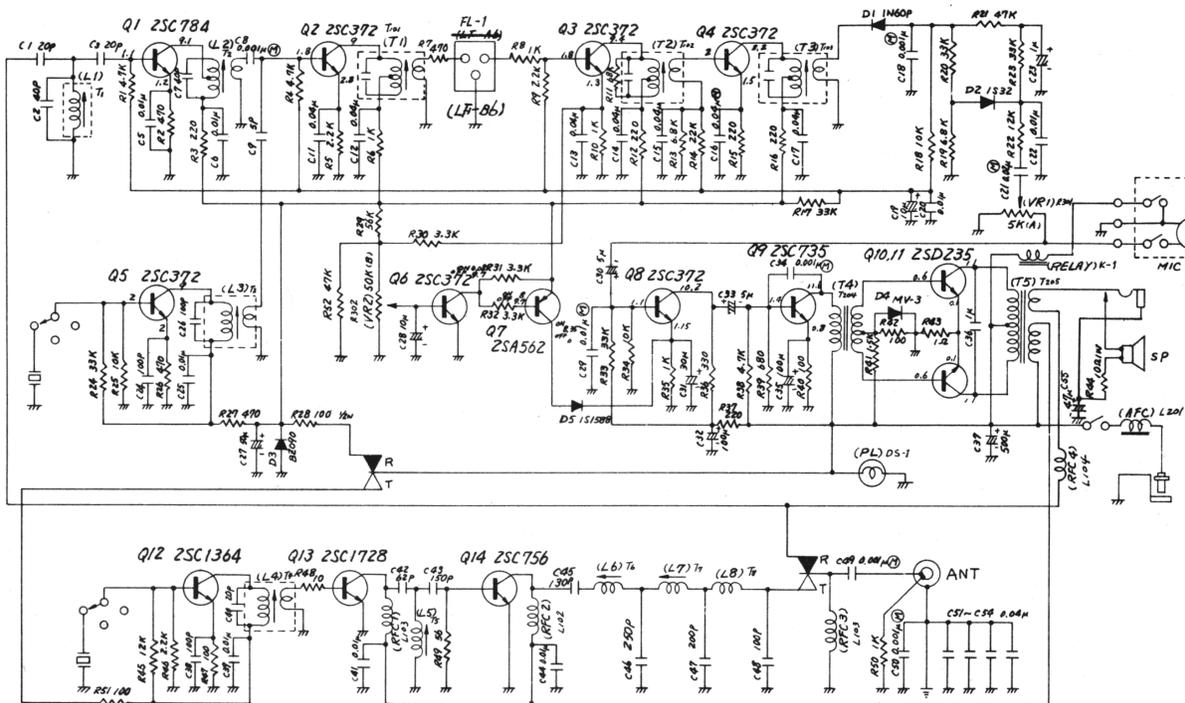

PARTS LIST

IP20-0006	Transistor, 2SC372, Q2 Thru 6, 8	IP21-0025	Coil, RF, HL-119, T2
IP20-0016	Diode, 1N60P, D1	IP21-0027	Coil, RF, HL-109, L103, L104
IP20-0019	Diode, BZ090, D3	IP21-0029	Coil, RF, HL-112, T8
IP20-0036	Transistor, 2SD235, Q10 Thru 11	IP21-0031	Transformer, E19-001, L201
IP20-0041	Transistor, 2SC735, Q9	IP21-0032	Coil, IF, LMC3054, T101
IP20-0046	Transistor, 2SA562, Q7	IP21-0033	Coil, IF, LPC4201A, T102
IP20-0050	Diode, IS32, D2	IP21-0034	Coil, IF, LMC4202A, T103
IP20-0055	Diode, MV-3, D4	IP21-0036	Transformer, E28-001, T205
IP20-0061	Diode, IS1588, D5	IP21-0047	Transformer, E19-005, T204
IP20-0176	Transistor, 2SC756, Q14	IP21-0117	Transformer, HL-128, T4
IP20-0177	Transistor, 2SC1728, Q13	IP21-0246	Coil, RF, HL-137, T5
IP20-0178	Transistor, 2SC1364, Q12	IP21-0247	Coil, RF, HL-136, T6
IP20-0179	Transistor, 2SC784, Q1	IP21-0248	Coil, RF, HL-135, T7
IP21-0016	Coil, RF, HL-110, L202	IP24-0009	Potentiometer w/ switch, 5K ohm, VR1
IP21-0019	Coil, RF, TKXN34386HM, T1	IP24-0010	Potentiometer, 50K ohm, VR2
IP21-0021	Coil, RF, TKXN34384BM, T3		
IP21-0023	Coil, RF, HL-111, L101	IP31-0048	Filter, Ceramic, LF-B6, FL1